

# SAC3118

GaAs MMIC Power Amplifier  
27.5GHz~32GHz 35.5dBm

Rev1.0

## Features

- Frequency: 27.5GHz~32GHz
- Gain: 27dB
- Output P<sub>-1dB</sub>: 35.5dBm
- Supply Voltage: +6V
- Power-Added Efficiency: 18%
- Die Size: 3.55mm×3.8mm×0.1mm
- Packaged: Bare Die

## Typical Applications


- Point-to-Point Radios
- SATCOM
- Military and Space
- Test and Measurement
- Radar

## General Description

The SAC3118 is a Ka-band GaAs MMIC power amplifier. The SAC3118 provides 27 dB of gain, and 35.5dBm of output power for 1 dB compression and 18%PAE from a +6V supply.

The chip has surface passivation for protection and backside via holes and gold metallization to allow a conductive epoxy die attach process. This device is well suited for communications, Point to Point radio and radar applications.

## Functional Diagram

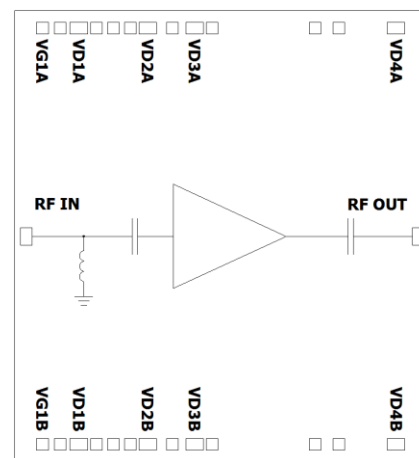

## Electrical Performance

T<sub>A</sub>=25°C, V<sub>D</sub>=+6V, I<sub>D</sub>=2A, Z<sub>0</sub>=50Ω, CW

Parameter	Min.	Typ.	Max.	Units
Frequency Range	27.5~32			GHz
Small Signal Gain	23	27	—	dB
Small Signal Gain Flatness	—	±2	—	dB
Reverse Isolation	—	-55	—	dB
Input Return Loss	—	-10	—	dB
Power-Added Efficiency	—	18	—	%
Output Power for 1 dB Compression (OP <sub>-1dB</sub> )	35	35.5	—	dBm
Output Third Order Intercept(OIP <sub>3</sub> )*	—	39	—	dBm
Drain Voltage(V <sub>D</sub> )	—	6	6.3	V
Gate Current	—	5	28	mA
Supply Current(I <sub>D</sub> )	—	3.2	3.7	A
Thermal Resistance	—	4.1	—	°C/W

\* Measurement taken at Pout / Tone = 18 dBm, f<sub>c</sub>= 30GHz, Δ f=10MHz

## Absolute Maximum Ratings


Maximum Input Power	+14dBm	Operating Temperature	-40°C ~ +70°C
Channel Temperature	+150°C	Storage Temperature	-65°C ~ +150°C
Maximum $V_D$	+6.5V	Maximum $V_G$	-1.2V

## Typical Small Signal Performance Curve


The results captured in the test-jig environment within connector plan

$V_D = +6v$   $I_D = 2A$  CW


Small Signal Gain(dB) vs. Temperature

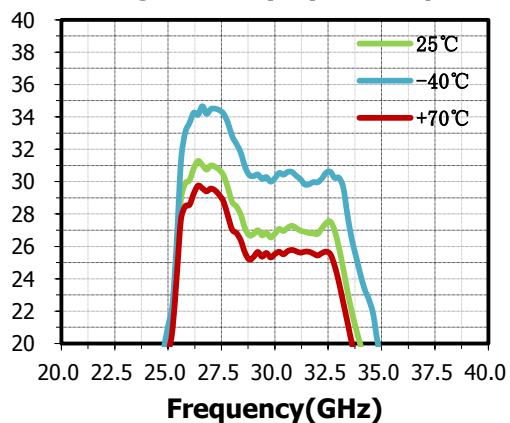


Reverse Isolation(dB) vs. Temperature

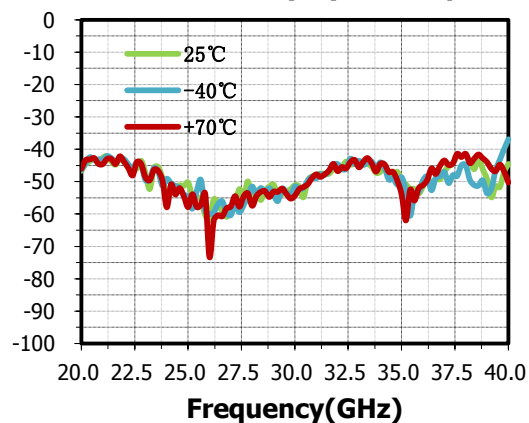

Input Return Loss(dB) vs. Temperature

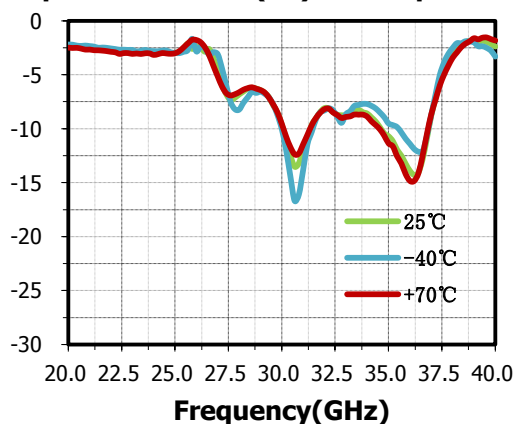

Output Return Loss(dB) vs. Temperature

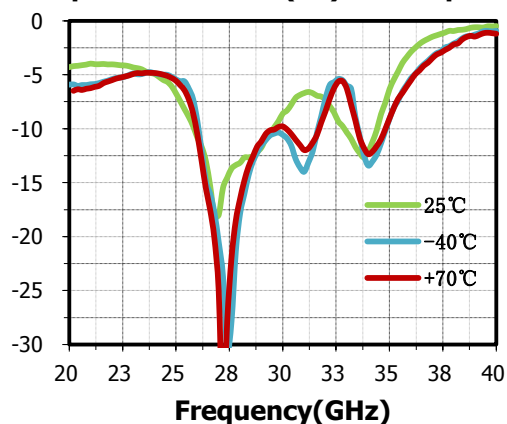

# SAC3118




GaAs MMIC Power Amplifier  
27.5GHz~32GHz 35.5dBm

Rev1.0



## Power and PAE Performance Curve

The results captured in the test-jig environment within connector plan, then de-embedded the housing and come back in the die plan

$V_D = +8v$   $I_D = 2A$  CW

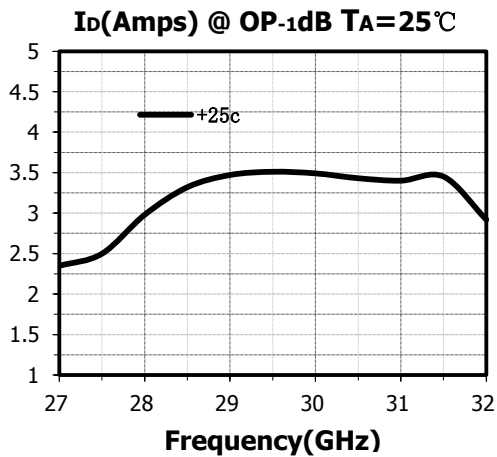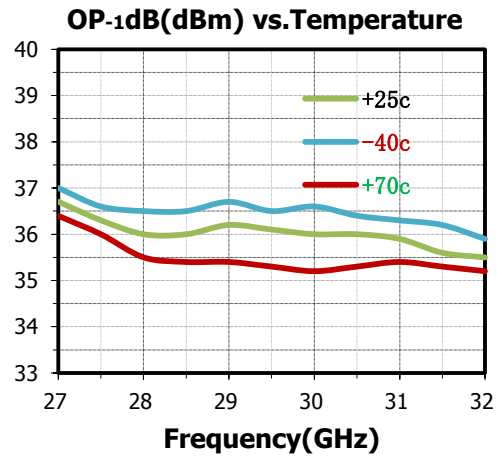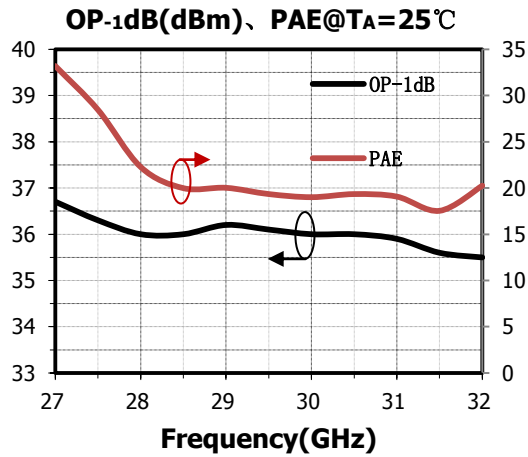



## OIP<sub>3</sub> , IM<sub>3</sub> Performance Curve

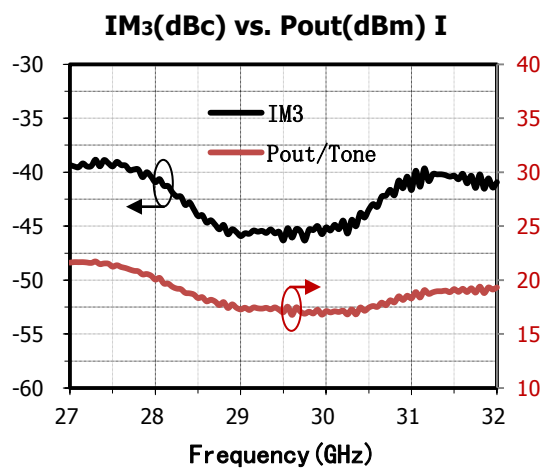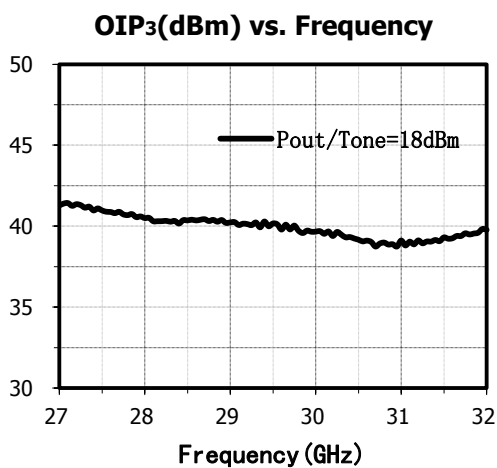

# SAC3118


GaAs MMIC Power Amplifier  
27.5GHz~32GHz 35.5dBm

Rev1.0

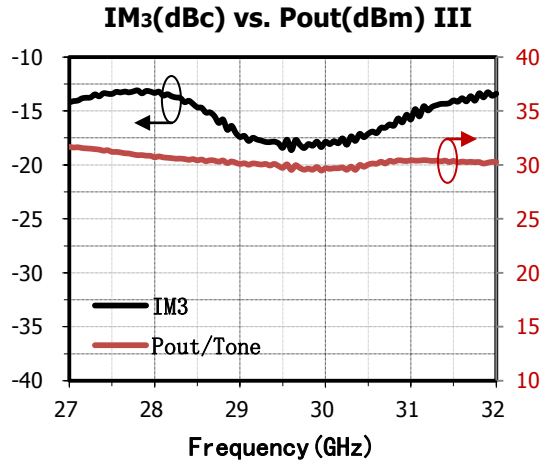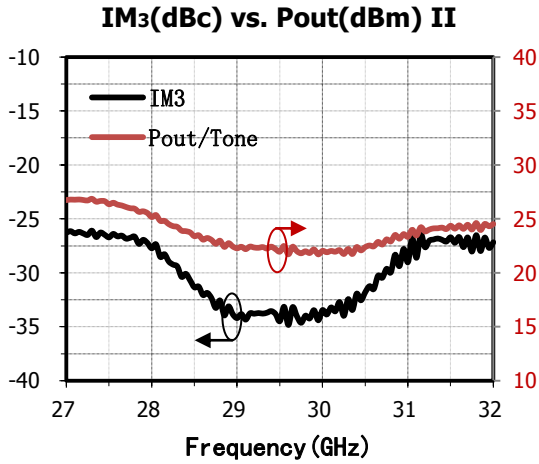


## Die Outline

(all dimensions in um)

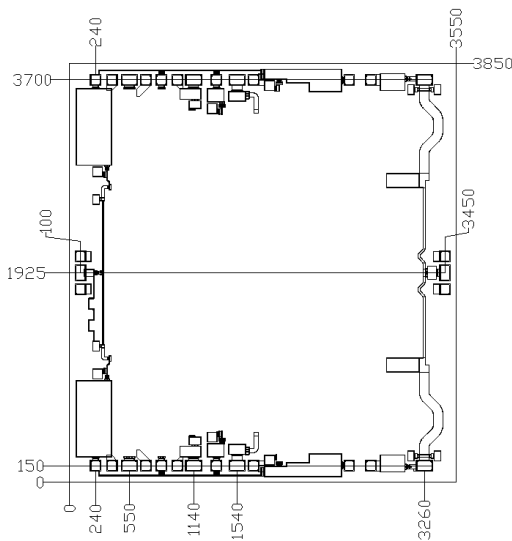

## Assembly Diagram

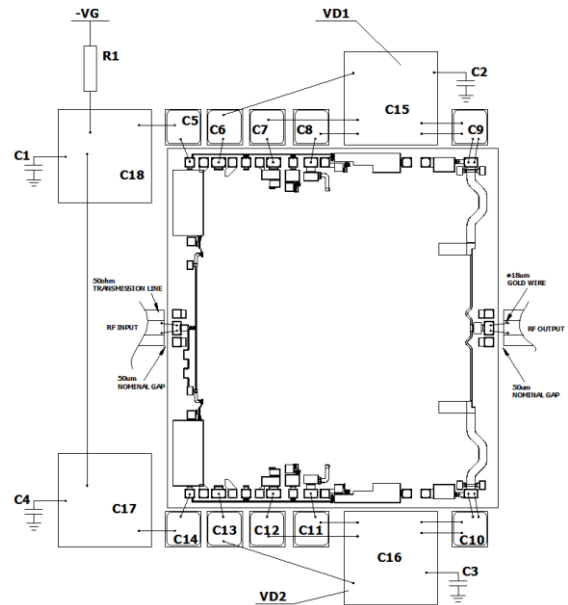

Bonding pad size: 150x100um VD1A~VD4A, VD1B~VD4B, RF IN, RFOUT pads  
100x100um VG1A, VG1B pads

# SAC3118

GaAs MMIC Power Amplifier  
27.5GHz~32GHz 35.5dBm

Rev1.0

## Components List

Reference Des.	Value	Part Number	Manuf.	Size
C1~C4	2.2uF	GRM155R61A225KE15D	Murata	0402
C5~C14	300pF	-	ANY	SLC
C15~C18	1000pF	-	ANY	SLC
R1*	20Ω	-	ANY	0603

\* The value of R1 varies with the internal resistance of the gate bias circuit. When the internal resistance value of the gate bias circuit is less than 2Ω, R1=10 to 20 ohm is suitable.

## Notes

1. The SAC3118 is biased with a positive drain supply and negative gate supply. The recommended gate voltage is set to -0.75~-0.9 V.
2. RF connections should be made as short as possible to reduce the inductive effect of the bond wire. Use of a 0.8 mil thermosonic wedge bonding is highly recommended as the loop height will be minimized. The RF input and output require a double bond wire as shown.
3. The backside of the SAC3118 is RF ground. Eutectic mounting is preferred. If using conductive epoxy, recommended epoxies is UNIMEC H9890-6A cured per the manufacturer's cure schedule. Epoxy should be applied in accordance with the manufacturer's specifications and should avoid contact with the top surface of the die. An epoxy fillet should be visible around the total die periphery.